




Type: **R 100.2CA**
Casing made of steel
Part no.: F00-10000



Curve:

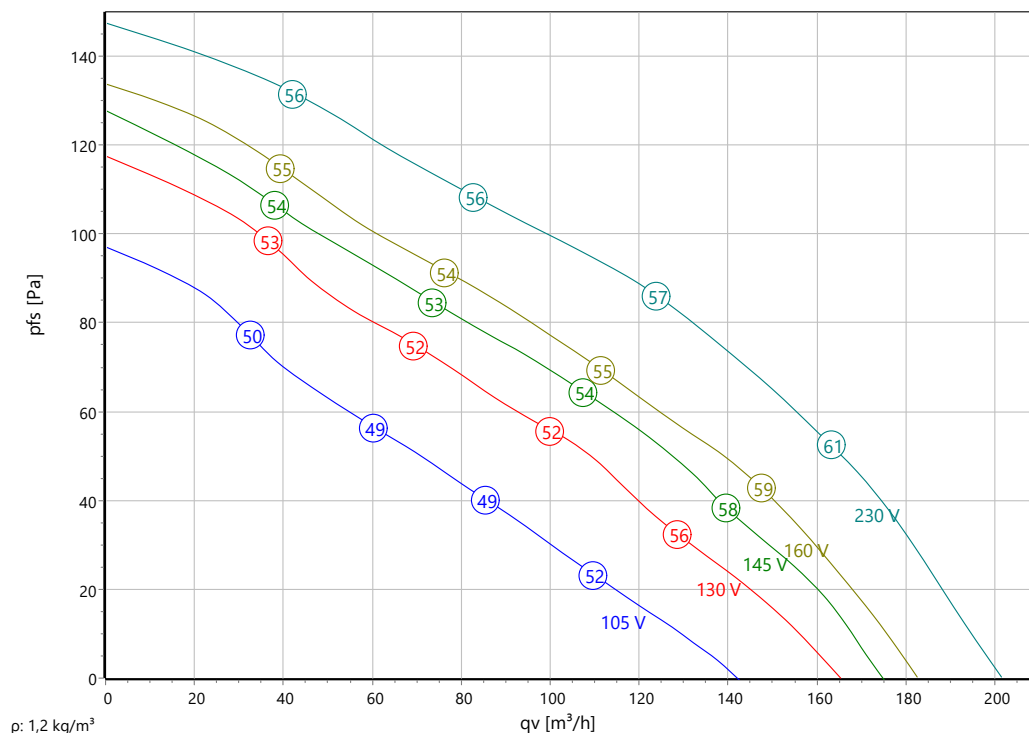

Nominal Data:

U [V]	f [Hz]	C [μF]	P _e [kW]	I _N [A]	n _N [r/min]	t _R [°C]	k ₁₀ [m²/s/h]	I _A / I _N	IP	m [kg]
1~230	50	1	0,027	0,12	2615	-20 .. +70	-	1,6	IP 44	1,9

Sound Data:

Frequency	Σ		125Hz	250Hz	500Hz	1kHz	2kHz	4kHz	8kHz	Distances	1 m	4 m
LwA(D,in) [dB(A)]	-1	-	-15	-7	-6	-7	-10	-19	-28	LpA(D,in) [dB(A)]	-8	-18
LwA(D,out) [dB(A)]		-	-15	-8	-5	-5	-8	-16	-26	LpA(D,out) [dB(A)]	-7	-17
LwA(D,cas) [dB(A)]	-15	-	-24	-21	-22	-22	-22	-31	-36	LpA(D,cas) [dB(A)]	-22	-32

ErP2018: Fan <30Watt




Type: **R 100.2CA**
 Casing made of steel
 Part no.: F00-10000



Part no.	Name	Quantity
F00-10000	R 100.2CA - Tube fan - 230V, 50/60Hz	1



Type: **R 100.2CA**
 Casing made of steel
 Part no.: F00-10000

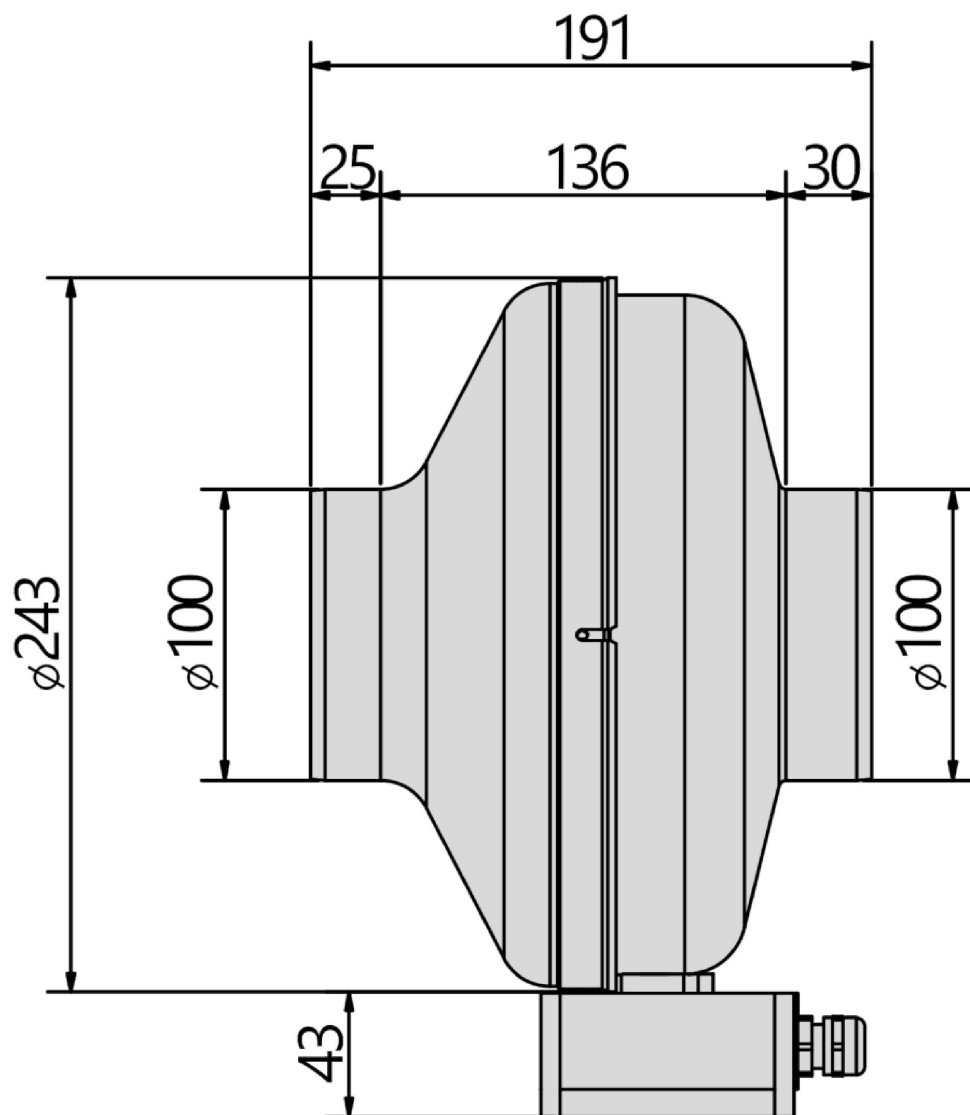




Type: **R 100.2CA**
 Casing made of steel
 Part no.: F00-10000



Einphasenwechselstrommotor mit Betriebskondensator und Thermostatschalter.
 Thermostatschalter intern mit der Wicklung in Reihe geschaltet.

Single phase A.C. motor with operating capacitor and thermostatic switch.
Thermostatic switch internal wired in series with windings.

Moteur monophasé avec condensateur permanent et interrupteur
thermostatique en série avec le bobinage en cas de branchement



U₁ blau / blue / bleu
 U₂ schwarz / black / noir
 Z braun / brown / brun
 PE gelb-grün
 yellow-green
 jaun-vert

TK3-20005


01.009




Type: **R 100.2CA**
 Casing made of steel
 Part no.: F00-10000



stat. Efficiency

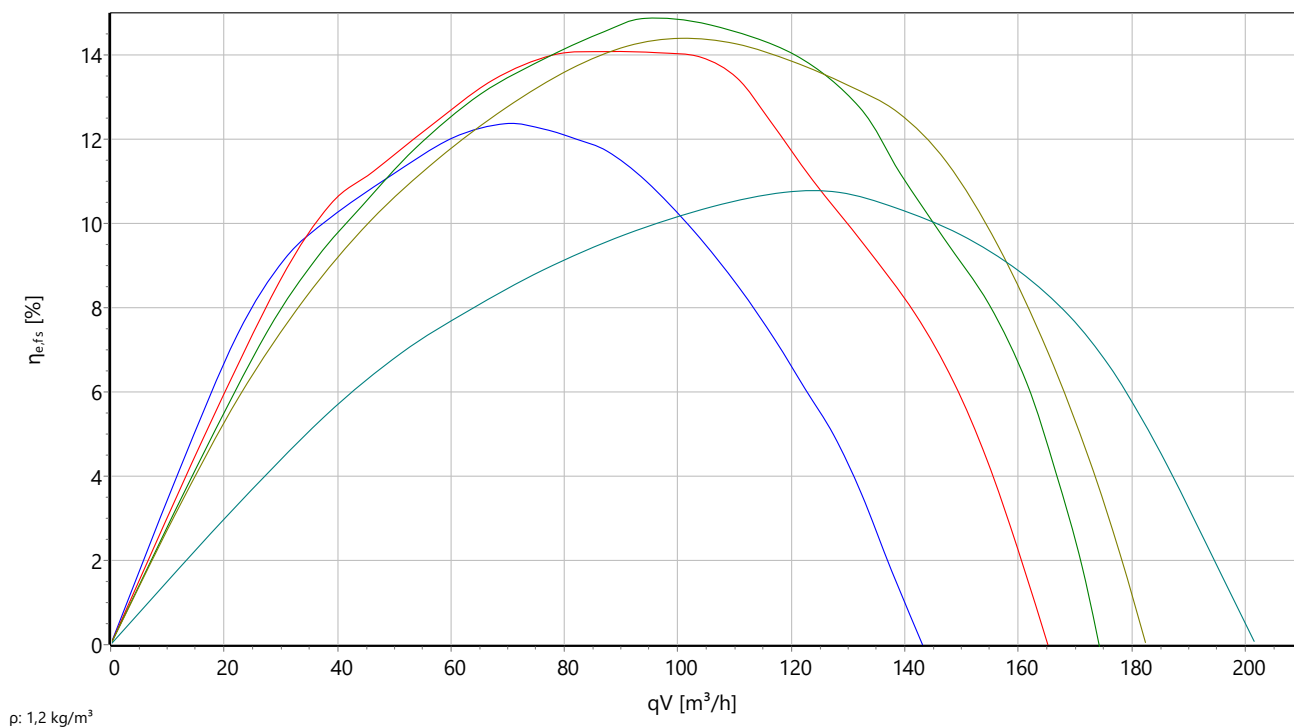

Input power

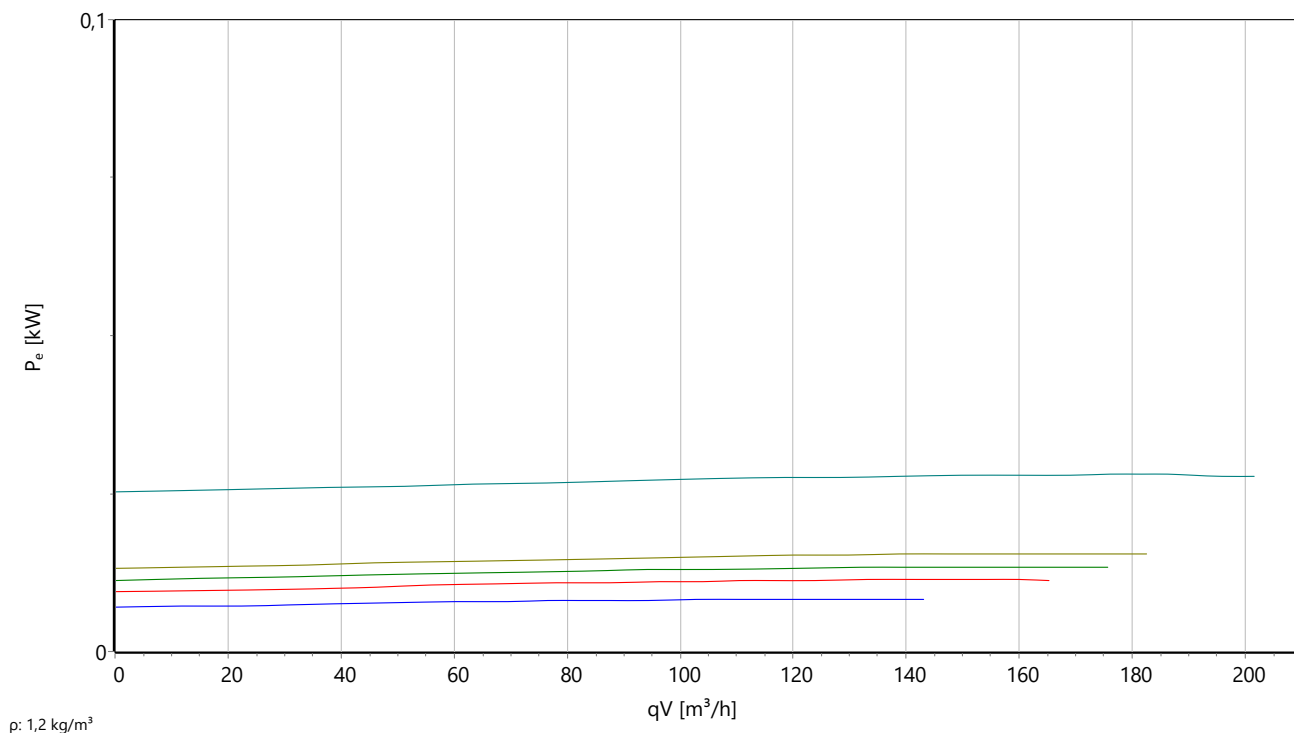




Type: **R 100.2CA**
 Casing made of steel
 Part no.: F00-10000



Sound power

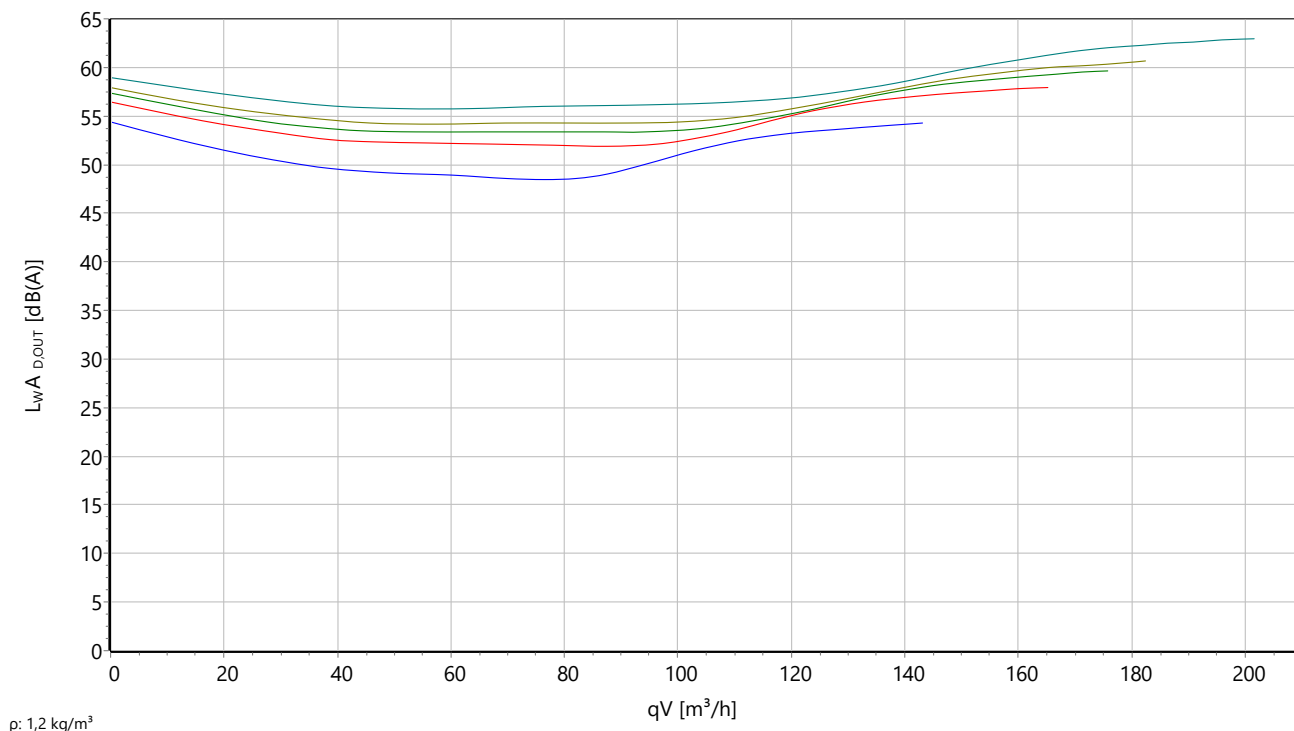

Speed

